


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101501

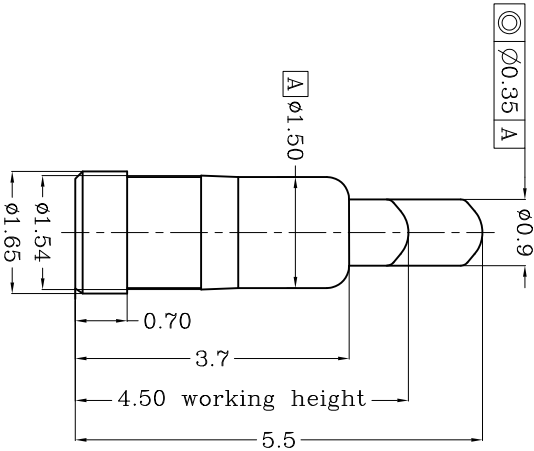


Table 1 Mechanical performance			
Working height	4.50mm	50±10 gf	<2.1>
Durability	10000cycle		

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

TOP LINK

- Not
- 1 Demnisions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
 - Resistance: 50mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Rev.	NEW	2011/07/01
Revision record.		Date.

Top-Link Electronics Ltd.			
Type	Customer drawing	Unit	mm
TOLERANCES UNLESS OTHER SPECIFIED	DWN: Q'in zuozhong	APVD:	
0.0 = ±0.15	CHK:	REL:	
0.00 = ±0.10	Name POGO PIN		
0.000 = ±0.05	SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		
Angle: ±1°	Scale 1:1	Size A4	DWG No. C-101501
			Page 1/1
			Rev. A

101501-1
PART NUMBER

Top-Link Electronics Ltd.