


DWG NO.
C-101134

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

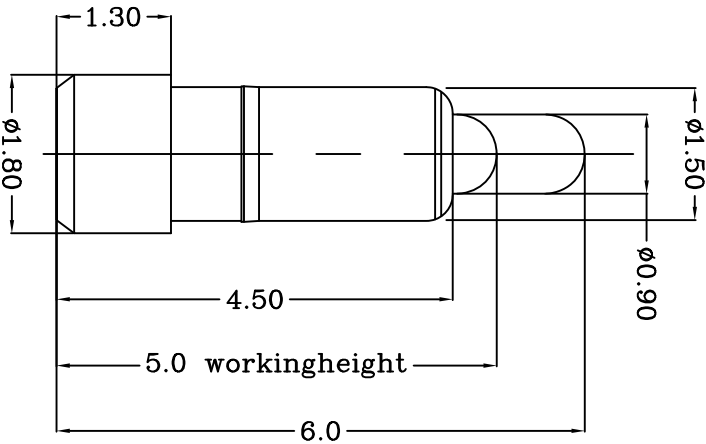

Notes:
△ Material(材质):

- 1)Body :Brass
- 2)Plunge :Brass
- 3)Spring :Stainless steel wire
- 2 Plating(电镀):
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.1um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
 - 1)Force: 80gf Min per pin at 1.0mm stroke (力: 下压1.0mm 压力: 80gf Min)
 - 2)Total stroke (总行程) : 1.40mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能):
 - 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

LDC
-
DIST
-

	update remark		2010/09/25
	NEW		2007/12/04
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -			0.0	= ±0.15		
0.00	= ±0.10			0.000	= ±		
SURF TEXTURE: 3.2/				ANGLE: ±1°			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DO NOT SCALE PRINT			
NAME		SCALE		A4		DWG NO.	
PGGD PIN		1:1		A4		C-101134	
PG-1.8-1.3-1.5-4.5-6.0							
Top-Link Electronics Ltd.							
SHEET 1 OF 1							
REV B							

101134-1
PART NUMBER

USED ON
-